


K3-4.5PMG

(50 Hertz)

Standard Features

- Kubota Diesel Engine
- Single bearing direct coupled generator
- Low 1,500 RPM operating speed
- Safety shutdown system for high coolant temperature or low lube oil pressure
- Single series circuit control system with no printed circuit boards – tinned wiring
- Freshwater double pass heat exchanger
- Water-cooled exhaust manifold with removable intergral Cupro-Nickel heat exchanger core
- Zinc anode in heat exchanger
- Stainless Steel exhaust elbow cast
- Gear-driven raw water pump
- 4-Point isolation mounts S/S
- Molded blue silicone water hoses with Stainless Steel AWAB clamps
- Air intake Cleaner / Silencer
- Main Line Circuit breaker
- Spin-on lube and fuel filters
- Belt guard
- 5-Year Limited Warranty

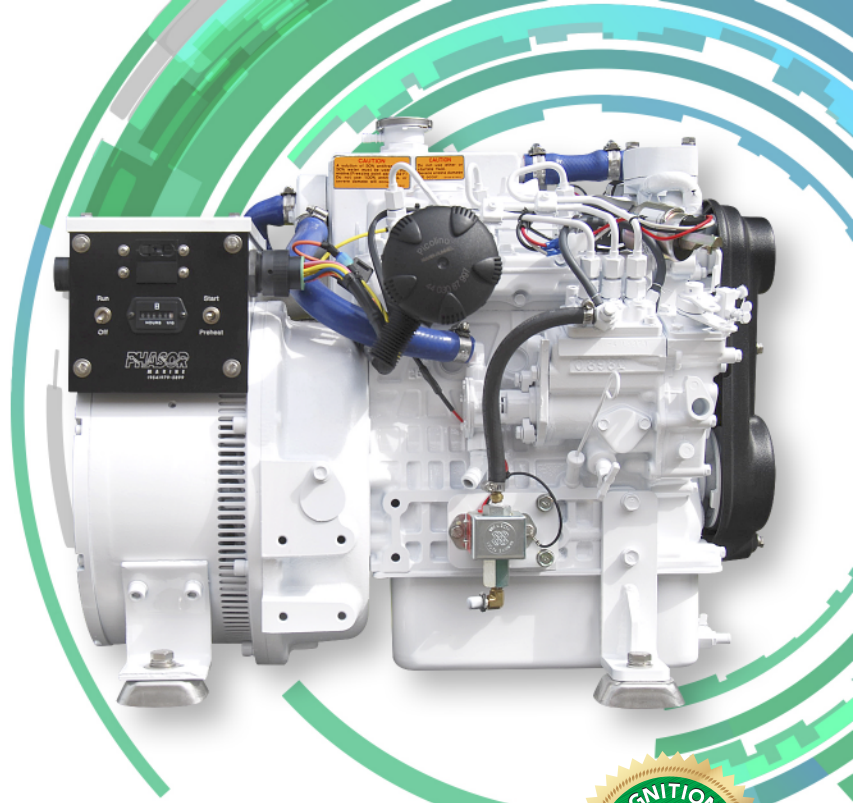

Specifications

Kubota Model	D902-E4B
Cylinders	3
Cu. In. Displacement	54.8
Bore x Stroke	2.83 x 2.90 (in.)
Dims (LxWxH)	20.5 x 18 x 22.5 (in.)
Enclosure Dims (LxWxH)	30 x 23 x 25.5 (in.)
Weight (lbs.)	320
Output (volts)	230
Output (amps)	19.56
Output (watts)	4,500
Exhaust Dia.	2 in.
Raw water Dia.	3/4 in.
Fuel Line Dia.	5/16 in.
Return Line Dia.	3/16 in.

Specifications are subject to change without notice

Optional Equipment

- Remote Start / Stop – 20ft. Harness
- Stainless Steel Drip Pan
- Sound Insulation Blanket
- DC Gauge Panel – 20ft. Harness
- Powder Coated Aluminum Enclosure
- Spare Parts Kit



2880 Hammondville Road • Pompano Beach, FL 33069

Ph: 954-979-5899 • Fax: 954-979-4349

info@phasormarine.com • www.phasormarine.com

rev112323