


K3-9.0KW

(50 Hertz)

Standard Features

- Kubota Diesel Engine
- Single bearing direct coupled generator
- Low 1,500 RPM operating speed
- Safety shutdown system for high coolant temperature or low lube oil pressure
- Freshwater double pass heat exchanger
- Water-cooled exhaust manifold with removable intergral Cupro-Nickel heat exchanger core
- Zinc anode in heat exchanger
- Cast Stainless Steel exhaust elbow
- Gear-driven raw water pump
- 4-Point isolation mounts Stainless Steel
- Molded blue silicone water hoses with Stainless Steel AWAB clamps
- Air intake Cleaner / Silencer
- Closed crankcase breather system
- Spin-on lube and fuel filters
- Secondary 5 Micron fuel filter
- Self-bleed fuel system
- USCG approved fuel lines
- Electric fuel transfer pump
- Awl-Craft 2000 urethane finish
- Belt guard
- Circuit breaker
- Start / Stop / Preheat / Hourmeter
- 5-Year Limited Warranty

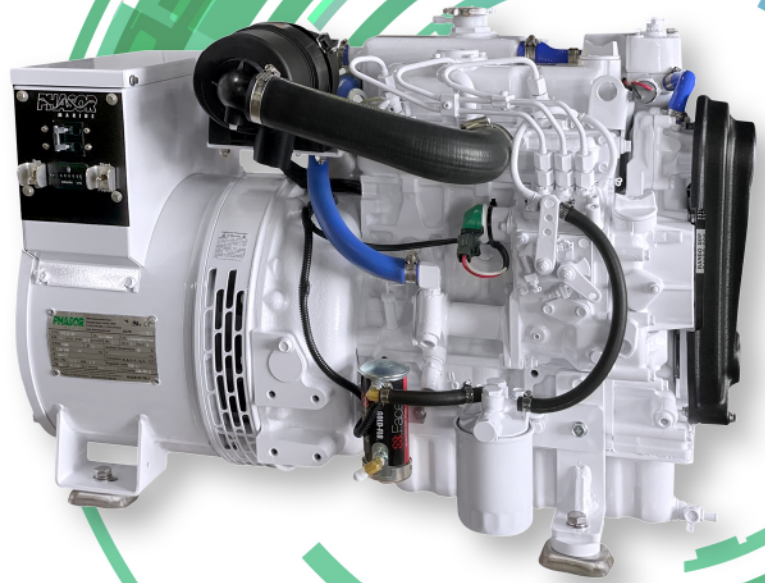

Specifications

Kubota Model	D1305-E3BG
Cylinders	3
Cu. In. Displacement	76.96
Bore x Stroke	3.07 x 3.46 (in.)
Dims (LxWxH)	33 x 18 x 23.25 (in.)
Enclosure Dims (LxWxH)	39 x 23 x 25.5 (in.)
Weight (lbs.)	483
Output (volts)	230
Output (amps)	39
Output (watts)	9,000
Exhaust Dia.	2 in.
Raw water Dia.	3/4 in.
Fuel Line Dia.	5/16 in.
Return Line Dia.	3/16 in.

Specifications are subject to change without notice

Optional Equipment

- Remote Start / Stop - 20ft. Harness
- DC Gauge Panel - 20ft. Harness
- Stainless Steel Drip Pan
- Three Phase Generator Output
- 24-Volt Starting System
- Sound Insulation Blanket
- Powder Coated Aluminum Enclosure
- Spare Parts Kit



2880 Hammondville Road • Pompano Beach, FL 33069
Ph: 954-979-5899 • Fax: 954-979-4349
info@phasormarine.com • www.phasormarine.com

rev112323