


# K4-10.5KW

## (50 Hertz)

### Standard Features

- Kubota Diesel Engine
- Single bearing direct coupled brushless generator
- +/- 1% Solid-state voltage regulation
- Low 1,500 RPM operating speed
- Safety shutdown system for high coolant temperature or low lube oil pressure
- Tinned wiring
- Freshwater double pass heat exchanger
- Water-cooled exhaust manifold with removable intergral Cupro-Nickel heat exchanger core
- Zinc anode in heat exchanger
- Stainless Steel exhaust elbow cast
- Gear-driven raw water pump
- 4-Point isolation mounts S/S
- Molded blue silicone water hoses with Stainless Steel AWAB clamps
- Air intake Cleaner / Silencer
- Spin-on lube filter
- Secondary 5 Micron fuel filter
- Self-bleed fuel system
- USCG approved fuel lines
- Electric fuel transfer pump
- Forged brass oil drain valve with safety lock
- Awl-Craft 2000 urethane finish
- Circuit breaker - main line
- Belt guard
- 5-Year Limited Warranty

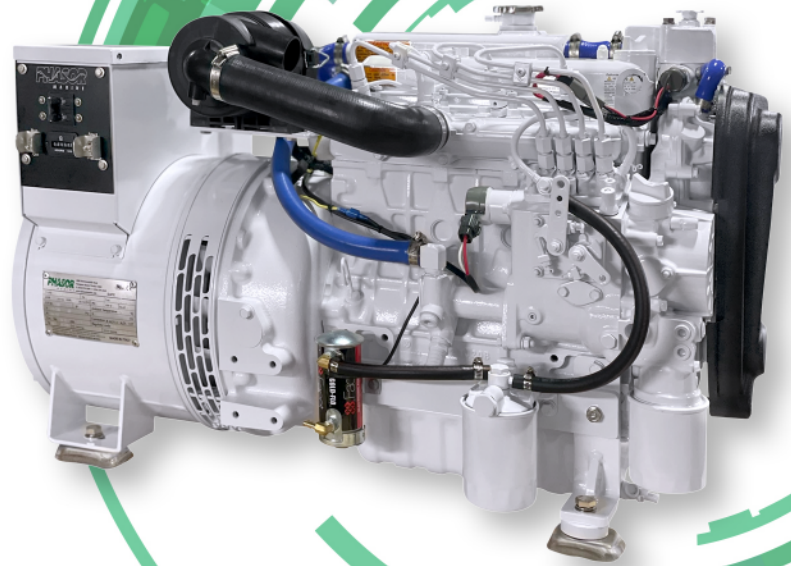

### Specifications

<b>Kubota Model</b>	<b>V1505-E4BG</b>
<b>Cylinders</b>	<b>4</b>
<b>Cu. In. Displacement</b>	<b>91</b>
<b>Bore x Stroke</b>	<b>3.07 x 3.09 (in.)</b>
<b>Dims (LxWxH)</b>	<b>36 x 18 x 23.25 (in.)</b>
<b>Enclosure Dims (LxWxH)</b>	<b>38 x 23 x 25.5 (in.)</b>
<b>Weight (lbs.)</b>	<b>547</b>
<b>Output (volts)</b>	<b>230 (50 Hertz)</b>
<b>Output (amps)</b>	<b>45.65</b>
<b>Output (watts)</b>	<b>12,500</b>
<b>Exhaust Dia.</b>	<b>2 in.</b>
<b>Raw water Dia.</b>	<b>1 in.</b>
<b>Fuel Line Dia.</b>	<b>5/16 in.</b>
<b>Return Line Dia.</b>	<b>3/16 in.</b>

*Specifications are subject to change without notice*

### Optional Equipment

- Remote Start / Stop - 20ft. Harness
- DC Gauge Panel - 20ft. Harness
- Stainless Steel Drip Pan
- Three Phase Generator Output
- 24-Volt Starting System
- Sound Insulation Blanket
- Powder Coated Aluminum Enclosure
- Spare Parts Kit



2880 Hammondville Road • Pompano Beach, FL 33069  
Ph: 954-979-5899 • Fax: 954-979-4349  
info@phasormarine.com • www.phasormarine.com

rev112323